




#HIVE

☐ ○ ● in

ELMERSMFG.COM

HARVEST WITH MORE VOLUME AND EFFICIENCY

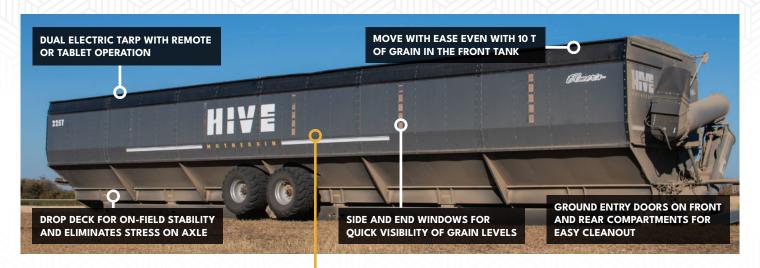

DUAL TANK DESIGN

- Hold crops with varying properties, such as moisture & protein, and blend them together.
- The dual tank design is a game-changer for grain farmers. Upgrade to Profor individual gate control and custom blending.
- Independant tank-length cleanout gates simplify maintenance and ensure minimal cross-contamination.

KEEP YOUR COMBINES MOVING

- The impressive 8250 bushel capacity keeps harvesters operating uninterrupted.
- Efficient power transmission with the 22" discharge auger and Powermaster Direct Drive Gearbox.
- 28 degrees of vertical pivot motion and 4-way spout control.

SIMPLIFIED TECHNOLOGY FOR ANY OPERATOR



Connect is a simplified scale and load management system. It provides you with live weights, GPS, and detailed load tracking so you know exactly how much is coming off the field and into your bins.



Pro-integration has cutting-edge features like double tap-to-fold, automatic return-to-home auger functions, and tablet or joystick-controlled auger and gate functions. Pro makes it easier for any experience-level operator to use the equipment with convenience and accuracy.

SPECIFICATIONS	8250 BU	(225 T)	5500 BU	(150 T)
Tank Length	66′ 11″	(20.4 m)	44′ 8″	(13.6 m)
Overall Length	78′ 3″	(23.84 m)	56′	(17.04 m)
Empty Weight	49,850 lbs	(22,610 kg)	40,700 lbs	(18,460 kg)
Field Height		14'	(4.28 m)	
Load In Height		13′ 4″	(4.06 m)	
Transport Height		15′ 10″	(4.82 m)	
Width		14′ 6″	(4.41 m)	
Auger Height		11′ 1″ - 16′ 1″	(3.38 m - 4.92 m)	
Auger Reach	2′ 10″ – 7′ 9″ (0.88 m – 2.36 m)		6 m)	
Tongue Weight		4,670 lbs	(2,100 kg)	
Unloading Auger		22"	(56 cm)	
Horizontal Auger		19"	(48 cm)	
Hydraulic Remotes (with PRO)		4	(1)	

FEATURE	BASE	CONNECT	PRO
Dual Tank	S	S	S
Scales		S	S
Tablet tarp control		S	S
Data Management		S	S
Cameras		0	0
Power Beyond			S
Dual Gate Control			S
Joystick / Tablet Control			S
Auto Truck Weight			S

ENQUIRE FOR AVAILABILITY