

| HAULMASTER OPTIONS | 1100 | 1300N | 1300 | 1500 | 1700 | 2000 | 2300 | 2500 | 3000 |
|---|------|-------|------|------|------|------|------|------|------|
| IF 1250/50R32 CFO | S | S | S | | | | -- | | |
| VF 520/85R42 CFO Row Crop Tandem | 0 | 0 | 0 | | | | -- | | |
| 800/60R32 Steerable Inline Tandem (SteerLock available w/CONNECT only) ² | 0 | 0 | 0 | S | | | -- | | |
| 900/60R32 Steerable Inline Tandem (SteerLock available w/ CONNECT only) ² | | | -- | | 0 | | -- | | |
| 1050/50R32 Steerable Inline Tandem (SteerLock available w/ CONNECT only) ² | | | -- | | 0 | 0 | | -- | |
| TT324 Transfer Track (30" x 140") | 0 | | | | -- | | | | |
| TT324 Transfer Track (36" x 140") | 0 | 0 | 0 | | | | -- | | |
| LT378 Large Track (36" x 170") | 0 | 0 | 0 | 0 | S | S | S | | -- |
| TW378 Tracks (42" x 170") | | | | -- | | | | 0 | S |
| Tandem Brakes (for 2 wheels only) | 0 | 0 | 0 | 0 | 0 | 0 | | -- | |
| Track Brakes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 5-Point Scale | 0 | 0 | 0 | 0 | S | S | S | S | S |
| Haulmaster CONNECT | 0 | 0 | 0 | S* | 0 | 0 | 0 | 0 | 0 |
| Haulmaster PRO | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| External CONNECT Scale Display | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Agrimatics Scale Indicator | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Digistar GT560 Scale Indicator | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Manual Tarp | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Electric Tarp | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Hydraulic Jack ² | 0 | 0 | 0 | 0 | 0 | 0 | 0 | S | S |
| Tow Hitch w/ Rope Hanger | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| CAT 4 Hitch | S | S | S | S | S | S | S | S | S |
| CAT 5 Articulating Hitch | -- | -- | -- | -- | 0 | 0 | 0 | 0 | 0 |
| 2 Ag Cam Kit (Back up and Spout) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Mud Scrapers (Track) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | S | S |
| Fire Suppression System ² | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| SPECIFICATIONS 1100-1300(N) w/ TT324, 1500-2300 w/ LT378 & 2500-3000 w/ TW378 | 1100 | 1300N | 1300 | 1500 | 1700 | 2000 | 2300 | 2500 | 3000 |
|---|------------|---------------------|------------|------------|------------|------------|------------|------------|------------|
| Width | 12' 2" | 12' 2" ¹ | 13' 5" | 13' 5" | 14' | 14' | 14' | 14' | 14' |
| Overall Length | 32' 3" | 32' 3" | 32' 10" | 32' 10" | 38' | 38' | 38' | 42' 11" | 42' 11" |
| Tank Length | 22' 8" | 22' 8" | 23' 3" | 23' 3" | 28' 3" | 28' 3" | 28' 3" | 33' 6" | 33' 6" |
| Loading Side Height | 10' 2" | 11' | 10' 5" | 11' | 10' 6" | 11' 4" | 12' 2" | 11' 3" | 12' |
| Transport Height | 11' 4" | 12' 2" | 11' 9" | 12' 4" | 12' | 12' 9" | 13' 6" | 12' 11" | 13' 5" |
| Auger Max Height | 14' 9" | 14' 9" | 16' | 16' | 16' 4" | 16' 4" | 16' 4" | 16' 7" | 16' 7" |
| Auger Max Reach | 9' | 9' | 10' | 10' | 9' 8" | 9' 8" | 9' 8" | 9' 8" | 9' 8" |
| Ground Clearance w/ Standard Undercarriage | 1' 6" | 1' 6" | 1' 6" | 1' 3" | 1' 3" | 1' 3" | 1' 3" | 1' 0.5" | 1' 0.5" |
| Empty Weight w/ TerraWave Tracks | | | -- | | | | | 40,300 lbs | 40,500 lbs |
| Empty Weight w/ Large Tracks | 30,500 lbs | 30,800 lbs | 31,100 lbs | 31,400 lbs | 33,300 lbs | 34,400 lbs | 35,600 lbs | -- | |
| Empty Weight w/ 36" Transfer Tracks | 28,600 lbs | 28,900 lbs | 29,200 lbs | | | | -- | | |
| Empty Weight w/ Tires & Wheels (1250 Tires) | 22,100 lbs | 22,400 lbs | 22,700 lbs | | | | -- | | |
| Empty Weight w/ Row Crop Tandem (520 Tires) | 24,900 lbs | 25,200 lbs | 25,500 lbs | | | | -- | | |
| Empty Weight w/ Steerable Inline Tandem | 26,400 lbs | 26,700 lbs | 27,000 lbs | 27,300 lbs | 32,500 lbs | 33,600 lbs | | -- | |
| Tongue Weight | 4,000 lbs | 4,000 lbs | 4,000 lbs | 4,100 lbs | 4,400 lbs | 4,400 lbs | 4,600 lbs | 5,200 lbs | 5,200 lbs |
| Unloading Auger | 22" | 22" | 22" | 22" | 24" | 24" | 24" | 24" | 24" |
| Horizontal Auger | 22" | 22" | 22" | 22" | 22" | 22" | 22" | 22" | 22" |
| Hydraulic Remotes ³ | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 5 | 5 |
| Required Tractor HP (KW) | 225 (170) | 250 (190) | 250 (190) | 300 (225) | 350 (260) | 400 (300) | 450 (340) | 480 (360) | 560 (420) |

| UNDERCARRIAGE | 1250 SINGLE TIRE | 520 ROW CROP TANDEM | 800 INLINE TANDEM | 900 INLINE TANDEM | 1050 INLINE TANDEM | TT324 TRACK | LT378 TRACK | TW378 TRACK |
|---------------------------------|------------------------|---------------------------|-------------------------|-------------------------|--------------------------|----------------|----------------|----------------|
| GROUND CONTACT AREA | | | | | | | | |
| Contact Area (in ²) | 3,050 | 2,950 | 3,950 | 4,800 | 5,600 | 6,400 | 9,200 | 10,720 |

¹ With Row Crop Tandem, Width is 12'
² Option Adds 1 Remote
³ Haulmaster Pro Reduce to 1 Remote
⁴ Standard with Inline Tandem

Legend: (0 - Optional) (S - Standard) (-- Not Available)

HAULMASTER



**UNMATCHED
CAPACITY & STABILITY**

**MASSIVE 2500 AND 3000 BU CAPACITY
ALL NEW TRACK DESIGN**




#HAULMASTER
 f i t y l n
 ELMERSMFG.COM



AVAILABLE HAULMASTER MODELS:

1100, 1300N, 1300, 1500, 1700, 2000, 2300, 2500 & 3000

AVAILABLE COLOURS:

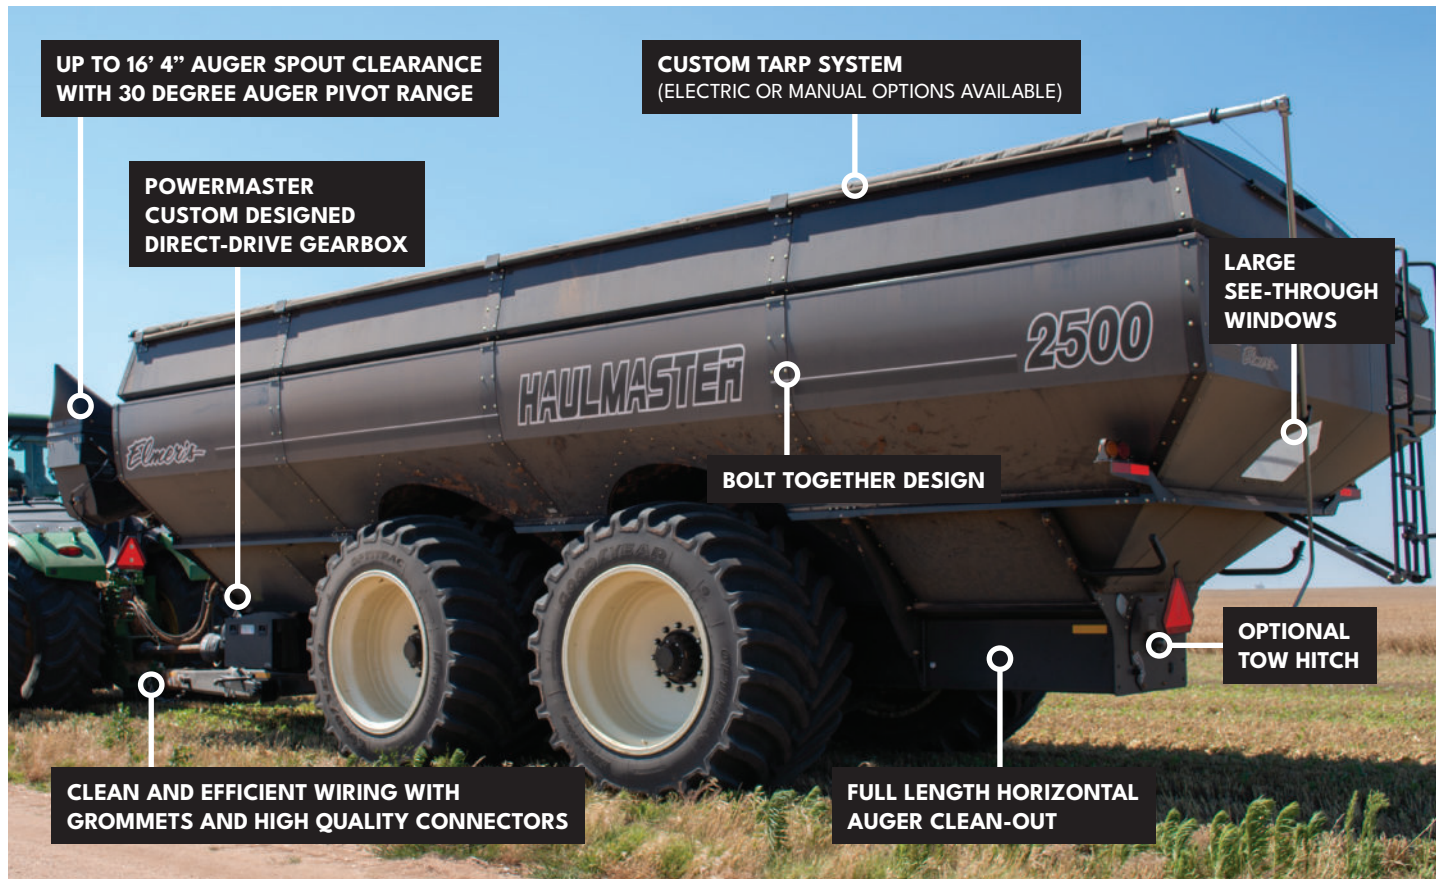

UP TO 16' 4" AUGER SPOUT CLEARANCE WITH 30 DEGREE AUGER PIVOT RANGE

CUSTOM TARP SYSTEM (ELECTRIC OR MANUAL OPTIONS AVAILABLE)

POWERMASTER CUSTOM DESIGNED DIRECT-DRIVE GEARBOX

LARGE SEE-THROUGH WINDOWS

BOLT TOGETHER DESIGN

OPTIONAL TOW HITCH

CLEAN AND EFFICIENT WIRING WITH GROMMETS AND HIGH QUALITY CONNECTORS

FULL LENGTH HORIZONTAL AUGER CLEAN-OUT

INDUSTRY-LEADING TECHNOLOGY

HAULMASTER PRO



EASY-TO-USE HYDRAULIC SYSTEMS GIVES THE OPERATOR ADVANCED TOOLS TO BE FASTER AND MORE EFFICIENT.

- Industry-exclusive double tap to fold/unfold auger.
- Industry-leading auger fold/unfold speed.
- Auto spout return home on fold.
- Auto gate close at 3 MPH, reducing liability of leaving the gate open.
- Auto gate close at predefined truck weight.

HAULMASTER CONNECT

SIMPLE INTERFACE TO INTERACT WITH YOUR HAULMASTER FEATURES.

- Detailed load tracking.
- No batteries required.
- Information stored on controller, not tablet.
- Includes tablet, window mount and charger for a turnkey solution.



STEERLOCK SYSTEM*

THE INDUSTRY-FIRST INTELLIGENT INLINE TANDEM LOCKING SYSTEM

- Auto engage at high speeds.
- Auto engage when travelling in reverse.
- Increased stability and ease of use.

*Only available on Inline Tandem with Haulmaster Connect.



MANAGE HARVEST DATA ANYWHERE

- Sync cart information with the cloud and have it accessible on a web browser, showing cumulative data from multiple carts.
- Users can back up farm information and save cart parameters online.

WHAT'S NEW FOR 2025

2500 & 3000 BUSHEL CAPACITY
With Ground access doors and new gate design.

ALL NEW TERRAWAVE TRACKS
Exclusive to the 2500 & 3000 carts.

STANDARD FIELD LIGHTING KIT
Additional lighting for on-the-go unloading at dusk.



NEW HAULMASTER CONNECT INTERFACE
Scan the QR code to see all the updates.

TESTIMONIALS

"The right-hand discharge, simplicity of the joystick, and the auto gate make the cart for us."
KENNY LUND (LUND HARVESTING)

"The right-hand unload has been a giant hit with the operators, and we are super impressed with how the cart has little to no wear."
BRANDON RITTER (RITTER FARMS)

"Elmer's created their success through listening to customers and their stellar customer service!"
ANDERS BUUS THOMSEN (BT HARVESTING)

TERRAWAVE TRACKS

LARGER CONTACT AREA ENHANCES STABILITY AND CONTROL.

- Increased footprint: 42" x 128".
- Superior Traction: Innovative pivoting frame and double oscillating bogies ensure better stability and performance even in the roughest field.
- Maximum Uptime: Grease-free bushings and oil bath hubs mean less maintenance and more hauling.
- Higher weight capacity and standard mudscrapers.

