WOLVERINE

DITCHER



ONE TOOL **FOR IT ALL**

Elmer's MANUFACTURING

#WOLVERINE

ELMERSMFG.COM

ONE TOOL TO CUT AND SPREAD DIRT

ELIMINATE THE NEED TO SCRAPE, DROP THE DIRT AND THEN INTEGRATE IT INTO THE SOIL.

The Wolverine Ditcher provides a similar finish to a scraper in significantly less time, with reduced field compaction and pulling resistance.



INTEGRATED NARROW STANCE DESIGN

The Narrow Stance Kit has the wheels set directly behind the Wolverine Ditcher within the waterway parameters, allowing for steeper-angled ditches.


FLAT CUTTING SURFACE

WOLVERINE DITCH

1000 ft Ditch
5000 ft³
15' wide x 5' flat x 6" deep = 5 ft³

ROTARY DITCH

1000 ft Ditch
2350 ft³
36" wide x 12" deep = 2.35 ft³

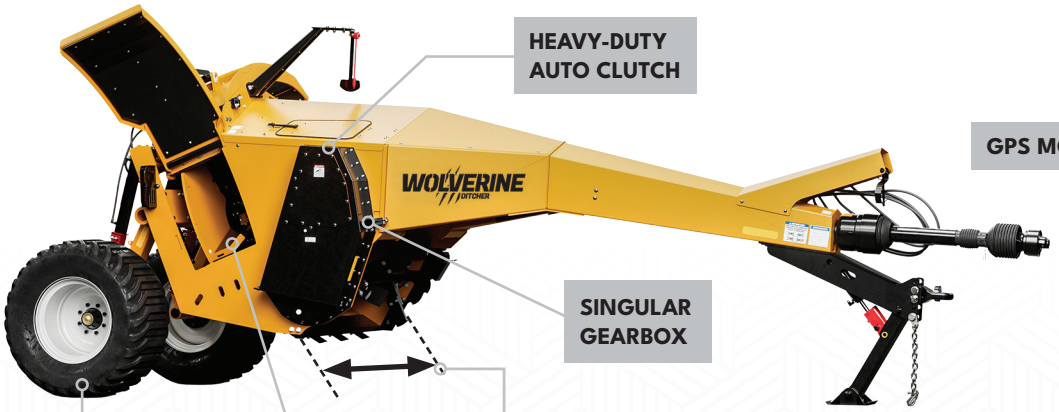

HEAVY-DUTY AUTO CLUTCH

GPS MOUNT

ADJUSTABLE HYDRAULIC RIGHT TILT

ADJUSTABLE LEFT OR RIGHT DISCHARGE

SINGULAR GEARBOX

62-INCH FLAT CUTTING SURFACE

550/45 R22.5 FLOTATION TIRES

BREAK-AWAY PADDLES



STANDARD TOOLBOX

HYDRAULIC JACK (OPTIONAL)

KICKER SHAFT WITH HYDRAULIC REVERSER

SPECIFICATIONS	
Weight	10,000 lbs (4,535 kg)
Size	22' L x 8' 6" W x 9' 7" H
Ideal Speed	<1.2 MPH with PTO at 1,000 RPM
Ideal Horsepower	250 HP with CVT/IVT
Disc Kit Weight	275 lbs
Disc Kit Diameter	20"
Disc Kit Hydraulics	Max 10 GPM, SCV + Case Drain Req
Cut depths up to 10 inches (average cut depth 4-6")	
Throws dirt over 150 feet	

HYDRAULIC INPUTS REQUIRED

1. Left or Right Discharge & Chute angle
2. Vertical Frame Lift
3. Right Frame Tilt
4. Hydraulic Kicker Shaft Reverser

OPTIONAL

1. Hydraulic Jack
2. Disc Kit

Version_2.2_10_23_2026